


CORE MINI TRACK

Minimal, functional and versatile; the Core Mini Track provides an ideal lighting solution for accent lighting in both residential and commercial applications.

- High CRI – Defining architectural details and finishes.
- Quick connection system – For durability and easy installation.
- Flicker free driver – To prevent eye strain.
- Available in 4 beam angles – For the perfect light application.
- Face it in any direction – Adjustable up to 90°, with a 350° rotation.
- Multiple finishes and baffle options to suit any aesthetic.

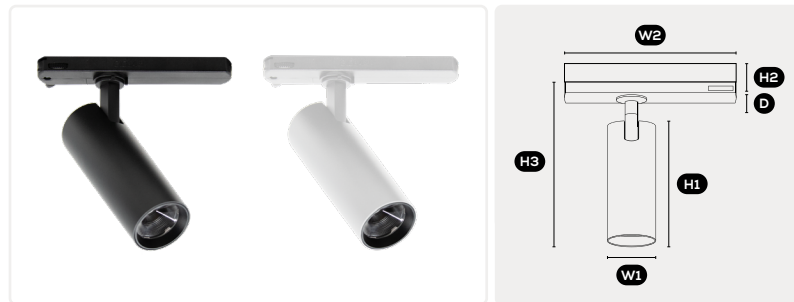

DIMENSIONS	H1 140mm	W1 Ø55mm	
DRIVER DIMENSIONS	H2 40mm	W2 170mm	D 31mm
HEIGHT FROM TRACK	H3 175mm		

LUMINAIRE OPTIONS

BEAM OPTIONS (REFLECTOR / LENS)

60° REFLECTOR **STANDARD** 60° 36° 24° 15°

FINISHES

☐ WHITE ☒ BLACK

GENERAL SPECIFICATIONS

LED	LUMENS (3000K 4000K)
11W	1140 lm 1200 lm
EFFICACY	Up to 109 Lm/W
COLOUR	3000K, Warm White 4000K, Cool White
MATERIAL	Powder Coated Aluminium
CRI	92+
IP	20
COLOUR DEVIATION	SDCM ≤2
UGR	<16
LIFETIME	> 55,000hrs L90B10
WARRANTY	5 Years

DRIVER SPECIFICATIONS

POWER	350mA 240V Built-In, Dimmable Driver
DIMMING	Phase Cut Dimming
POWER FACTOR	> 0.95

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K	118-COTM311W603
White, 4000K	118-COTM311W604
Black, 3000K	118-COTM311B603
Black, 4000K	118-COTM311B604
White, 3000K, DALI	118-COTM311W603D
White, 4000K, DALI	118-COTM311W604D
Black, 3000K, DALI	118-COTM311B603D
Black, 4000K, DALI	118-COTM311B604D

ACCESSORIES

36° Reflector	118-RFLE336
24° Reflector	118-RFLE324
15° Reflector	118-RFLE315
60° Lens	118-LSE360
36° Lens	118-LSE336
24° Lens	118-LSE324
15° Lens	118-LSE315

