


f8.10w192x.23k60k

24V LED Flex Strip ::::: 8mm · 10W/m · 95CRI · CCT adjustable

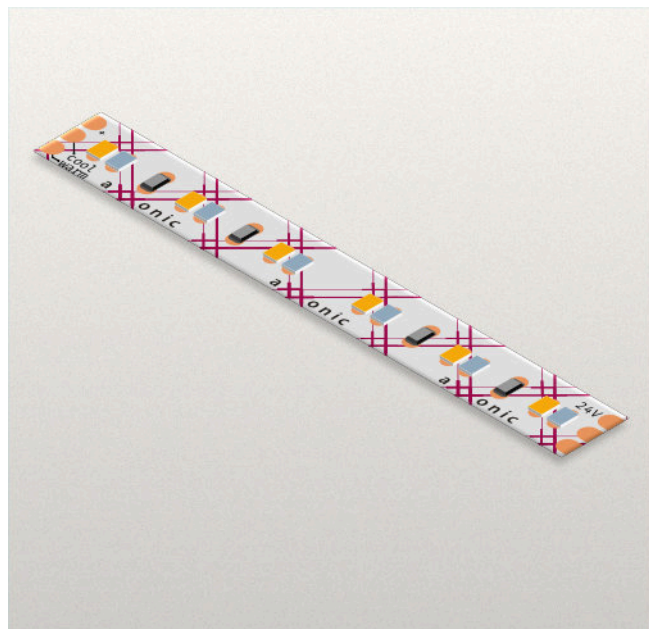

Features

- 192 white and white LED/m on a flexible 8mm
- Colour Temperature Mixed: #2300K+6000K
- High colour rendering — 95 CRI
- 10 Watts/metre
- 24Volts DC
- 3 years warranty

Applications

- For indoor and integrated use. Outer jacket is heat-shrunk plastic for easy cleaning.
- Features 8mm width strip which has a wide-range of white light tones.
- Suitable for general and commercial indoor white lighting, colour temperature preference

Physical

Dimension	
Strip width	8 mm
Cuttable length (min.)	62.5 mm
Printed circuit width	8 mm
Roll length	10 m
Material	
Strip base	Flexible printed circuit board
Back	Peel-off adhesive
Ingress rating	IP54

Electrical


Connection	
Solder pads	3: [+] [-] [-]
Component	
Light source(s)	2216 White [2300K] SMT LED 2216 White [6000K] SMT LED
Source density	192 LED/m
Performance	
Voltage	24 V
Current	~417 mA
Power (per metre)	10 W/m

Photometric


Output	
Lumens	670 Lm/m
Beam angle	120 °
Colour	
Rendering	95+ CRI
Matching	<3 SDCM
Options	
Warm White + Cool White	2300K + 6000K



Polar diagram

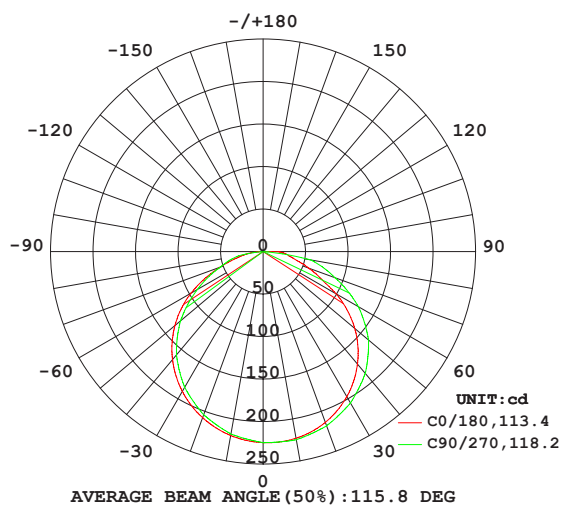


Recommended profiles

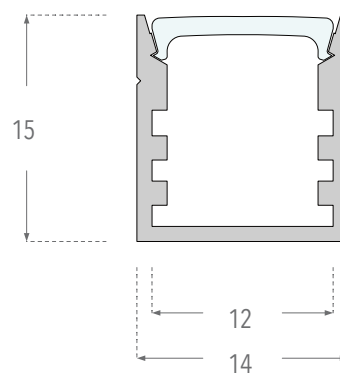

p14x15.sur

Models

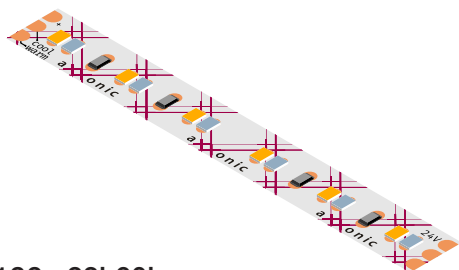

f8.10w192x.23k60k

Attention:

1. Application surface must be smooth, clean and dry.
2. Sensitive electronics on-board. Handle with care.
3. Strip can be cut and joined at solder pads.

Note: Please quote the full product code while placing the order, along with the required colour temperature option where specified.