


# LITE 108

The high-performance LITE 108 combines high lumen per watt efficacy and dynamic illumination. It also features a uniquely designed heat sink, for maximum heat dissipation in projects with minimum ceiling space.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.
- > 55,000hrs L90B10 Lifetime.

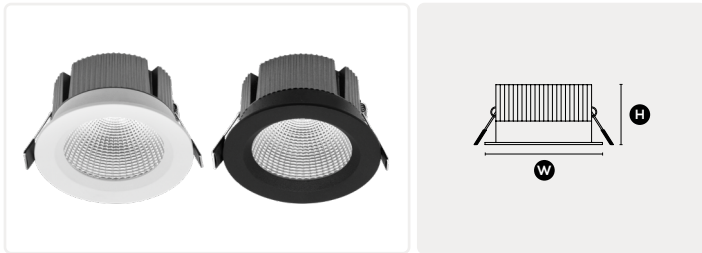

**DIMENSIONS**      **W** Ø108 mm    **H** 56 mm  
**CUT-OUT**            **i** Ø92mm

## LUMINAIRE OPTIONS

**LED & LUMENS OPTIONS** (3000K | 4000K)

**12W**                      **10W**  
 1060lm | 1130lm      860lm | 880lm

**BEAM OPTIONS**

60°    **STANDARD**    36°

**FINISHES**

WHITE     BLACK

## GENERAL SPECIFICATIONS

**EFFICACY**              Up to 94 Lm/W  
**COLOUR**              3000K, Warm White  
 4000K, Cool White  
**MATERIAL**            Powder Coated Material  
**CRI**                      92+  
**IP**                         44  
**COLOUR DEVIATION**    SDCM ≤2  
**UGR**                     <23  
**LIFETIME**              > 55,000hrs L90B10  
**WARRANTY**            5 Years

## DRIVER SPECIFICATIONS

**DIMENSIONS**            L 104 x W 43 x H 24mm  
**POWER**                  300mA | 250mA 240V  
 Remote Dimmable Driver  
**DIMMING**              Phase Cut Dimming  
**POWER FACTOR**       > 0.90

## PROJECT DETAILS

**PROJECT**

**TYPE**

**NOTES**

## PRODUCT CODES

White, 3000K            **118-LI2L12W603**  
 White, 4000K            **118-LI2L12W604**  
 Black, 3000K            **118-LI2L12B603**  
 Black, 4000K            **118-LI2L12B604**

## ACCESSORIES

36° Reflector            **118-RFLL36**

## DRIVER CODES

12W                        **118-300MA**  
 10W                        **118-250MA**

