


LITE 125

The high-performance LITE 125 features high lumen per watt efficacy and visually dynamic illumination; ideal for large-scale commercial projects that require higher powered fittings. Now leading the Lite Series in both lumen output and power.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.

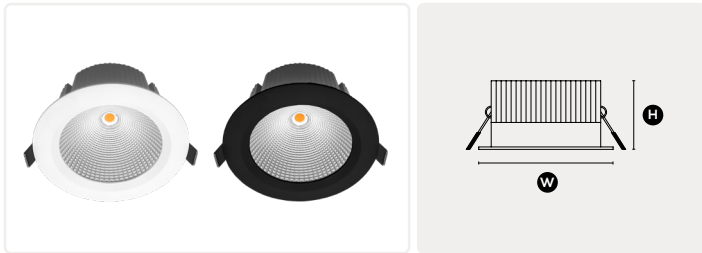

DIMENSIONS **W** Ø125 mm **H** 66.5 mm
CUT-OUT **i** Ø110mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

FINISHES

WHITE BLACK

GENERAL SPECIFICATIONS

LED	LUMENS (3000K 4000K)
25W	2000 lm 2100 lm
EFFICACY	Up to 84 Lm/W
COLOUR	3000K, Warm White 4000K, Cool White
MATERIAL	Powder Coated Material
CRI	92+
IP	44
COLOUR DEVIATION	SDCM ≤2
UGR	<21
LIFETIME	> 55,000hrs L80B10
WARRANTY	5 Years

DRIVER SPECIFICATIONS

DIMENSIONS	L 104 x W 43 x H 24mm
POWER	600mA 240V Remote Dimmable Driver
DIMMING	Phase Cut Dimming
POWER FACTOR	> 0.90

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K, 60°	118-LI2W25W603
White, 4000K, 60°	118-LI2W25W604
Black, 3000K, 60°	118-LI2W25B603
Black, 4000K, 60°	118-LI2W25B604

ACCESSORIES

36° Reflector **118-RFLXL36**

