


## LITE MINI

The high-performance LITE MINI combines high lumen per watt efficacy and dynamic illumination. It also features a uniquely designed heat sink, for maximum heat dissipation in projects with minimum ceiling space.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.
- > 55,000hrs L90B10 Lifetime.

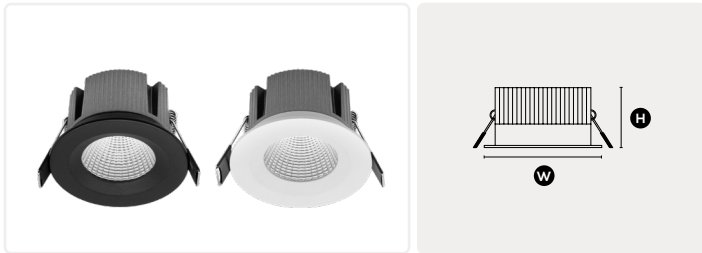

**DIMENSIONS** **W** Ø85 mm **H** 49 mm  
**CUT-OUT** **i** Ø76mm

### LUMINAIRE OPTIONS

#### LED & LUMENS OPTIONS (3000K | 4000K)

**10W** 960lm | 1040lm **8W** 750lm | 830lm

#### BEAM OPTIONS

60° **STANDARD** 36°

#### FINISHES

WHITE  BLACK

### GENERAL SPECIFICATIONS

**EFFICACY** Up to 104 Lm/W

**COLOUR** 3000K, Warm White  
4000K, Cool White

**MATERIAL** Powder Coated Material

**FINISH** White | Black

**CRI** 92+

**IP** 44

**COLOUR DEVIATION** SDCM ≤2

**UGR** <19

**LIFETIME** > 55,000hrs L90B10

**WARRANTY** 5 Years

### DRIVER SPECIFICATIONS

**DIMENSIONS** L 104 x W 43 x H 24mm

**POWER** 250mA | 200mA 240V  
Remote Dimmable Driver

**DIMMING** Phase Cut Dimming

**POWER FACTOR** > 0.90

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

White, 3000K, 60° **118-LI2M10W603**  
White, 4000K, 60° **118-LI2M10W604**  
Black, 3000K, 60° **118-LI2M10B603**  
Black, 4000K, 60° **118-LI2M10B604**

### ACCESSORIES

36° Reflector **118-RFLM36**

### DRIVER CODES

10W **118-250MA**  
8W **118-200MA**

