




LIGHTING THAT OUTPERFORMS
SINCE 1998

LUNA 400

The Luna 400 is designed to create indirect ambient lighting. Its unique surface allows the fixture to blend discretely, or make a noticeable statement in its environment with its elegant aesthetics and captivating backlight. Available in three finishes and three colour selectable.

PRODUCT SPECIFICATIONS

| | |
|------------------------|-----------------------------------|
| Installation | Fixed Surface Mount |
| Finish | Black/Satin Brass/White |
| Material | Aluminum |
| Beam Angle | 120° |
| Wattage | 20W |
| Voltage | 240V 50Hz |
| Power Factor | 0.95 |
| Dimming | Trailing Edge/Universal |
| LED | SMD |
| Colour Temp | 3000K, 4000K, 6000K |
| CRI | >90 |
| Lumen | 539lm(3K), 562lm (4K), 552lm (6K) |
| Lamp Expectancy | >40,000hrs |
| IP Rating | IP20 |
| Warranty | 3 Years |

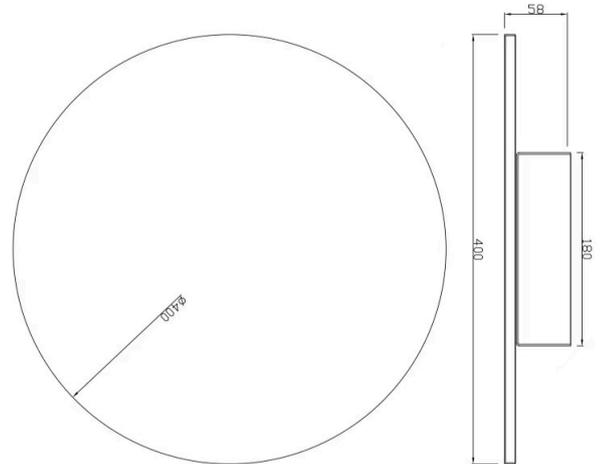

ORDERING CODES



UWL-LUNA-400-BLK-3CCT



UWL-LUNA-400-SB-3CCT



UWL-LUNA-400-WH-3CCT

UGE ACCESSORIES

| DESCRIPTION | MODEL NUMBER | IMAGE |
|------------------------|--------------|-------|
| LED Push Button Dimmer | UDIMMER-350 | |