

LUXE CIRCLE

Architectonic and balanced, the LUXE CIRCLE combines advanced LED technologies, with high quality materials and refined, contemporary aesthetic. The entire Luxe series has recently been redesigned, now incorporating a much higher CRI and more wattage options.


- Superior quality polycarbonate housing.
- UV resistant material.
- Switchable between two wattages.
- Integrated, flicker free, dimmable driver.
- IP 54 – Suitable for wet areas.

PROJECT DETAILS

PROJECT

TYPE

NOTES

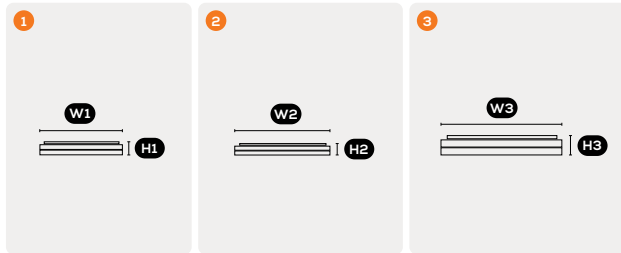

1 DIMENSIONS H1 53mm W1 Ø220mm

2 DIMENSIONS H2 49mm W2 Ø270mm

3 DIMENSIONS H3 63mm W3 Ø400mm

LUMINAIRE OPTIONS

SIZE / LED / LUMENS OPTIONS (3000K | 4000K)

1 Ø220mm, 10W / 15W, 1000lm | 1500lm

2 Ø270mm, 18W / 24W, 1800 lm | 2400lm

3 Ø400mm, 29W / 38W, 2900 lm | 3800 lm

GENERAL SPECIFICATIONS

EFFICACY 100 lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Polycarbonate

FINISH White

BEAM 110°

CRI 90+

IP 54 (220 & 270) | 20 (400)

IK 10

COLOUR DEVIATION SDCM ≤3

UGR <26

LIFETIME > 30,000hrs L70B10

WARRANTY 3 Years

DRIVER SPECIFICATIONS

POWER 240V Built-In Flicker
Free Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.95

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

1 220mm, 10W/15W, 3000K **83-LXC2215W3**

1 220mm, 10W/15W, 4000K **83-LXC2215W4**

2 270mm, 18W/24W, 3000K **83-LXC2724W3**

2 270mm, 18W/24W, 4000K **83-LXC2724W4**

3 400mm, 29W/38W, 3000K **83-LXC4038W3**

3 400mm, 29W/38W, 4000K **83-LXC4038W4**

