


F16-29W-320

Mitsi 29

24V LED Flexible Strip ::::: 16mm · 29W/m · 95+ CRI

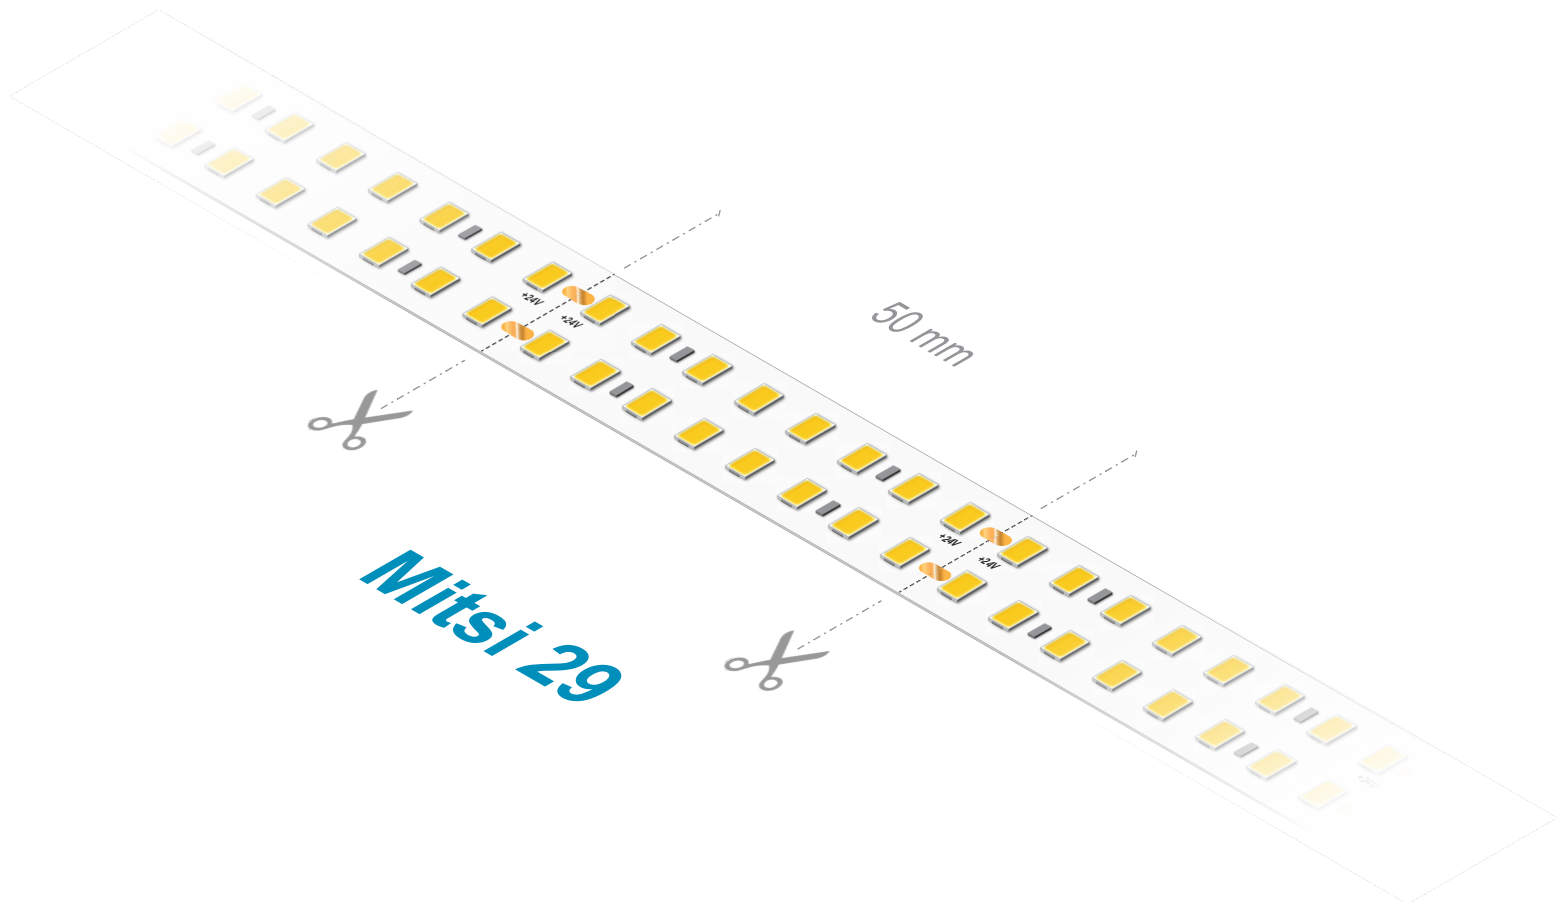

Features

- 29 W/m
- High Density - 320 LEDs/m
- Flexible 10mm Circuit Board
- Colour Temperatures: 2200K, 2700K, 3000K, 4000K
- High Colour Rendering — 95+ CRI
- 24 Volt DC
- 5 Year Warranty

Applications

- High LED density ensures dotless appearance even in shallow extrusion profiles
- Ideal for a range of applications, from task lighting to room illumination

Physical

Dimension	
Strip width	16 mm
Cuttable length (min.)	50 mm
Roll length	5 m
Material	
Strip base	Flexible Circuit Board
Back	3M Adhesive
Ingress rating	IP20

Electrical

Connection	
Solder pads	2: [+] [-]
Component	
Light source(s)	2835 LED
Source density	320 LED/m
Performance	
Voltage	24 V
Current	~1208 mA/m
Power (per metre)	29 W/m

Photometric

Output	
Lumens	3668 - 4646 lm/m
Beam angle	120°
Colour	
Rendering	95+ CRI
Matching	<3 SDCM
Options	
Colour Temperatures	2200K, 2700K, 3000K, 4000K

Installation

- Do NOT turn LED strip on while rolled up on the spool!
- Install on clean and dry surface
- Install on heat sinking aluminium extrusion
- Maximum continuous run per power injection: 5m
- Maximum bending radius: 3cm
- Do not twist LED strip