


## PRO ADJUSTABLE

The Pro Adjustable downlight has been designed for versatility. With a tilting ability of up to 40° and a rotation of up to 350°, the Pro Adjustable allows complete control of the light direction. Ensuring that you always have the maximum light distribution from the LED.

- Precision reflector options – for better light distribution.
- Specially designed heatsink – for class leading heat dissipation.
- Adjustable up to 40° and rotatable up to 350°.
- IC-4 Rated
- Black baffle design for eliminating glare.

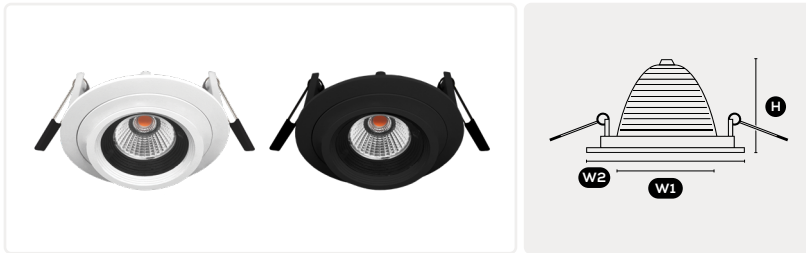

**DIMENSIONS** W1 Ø70 mm W2 Ø106 mm H 65mm  
**CUT-OUT** Ø92mm

### LUMINAIRE OPTIONS

**LED & LUMENS OPTIONS** (3000K | 4000K)

**10W** 965lm | 1015lm  
**8W** 835lm | 880lm

**BEAM OPTIONS**

60° **STANDARD** 36° 24°

**FINISHES**

WHITE  BLACK

### GENERAL SPECIFICATIONS

**EFFICACY** Up to 110 Lm/W  
**COLOUR** 3000K, Warm White  
 4000K, Cool White  
**MATERIAL** Powder Coated Material  
**FINISH** White | Black  
**CRI** 97+  
**IP** 20  
**COLOUR DEVIATION** SDCM ≤2  
**UGR** <19  
**LIFETIME** > 55,000hrs L80B10  
**WARRANTY** 7 Years

### DRIVER SPECIFICATIONS

**DIMENSIONS** L 98 x W 38 x H 24 mm  
**POWER** 300mA | 250mA 240V  
 Remote Flicker Free  
 Dimmable Driver  
**DIMMING** Phase Cut Dimming  
**POWER FACTOR** > 0.90

## PROJECT DETAILS

**PROJECT**

**TYPE**

**NOTES**

### PRODUCT CODES

White, 3000K, 60° **118-PR7AR11W603**  
 White, 4000K, 60° **118-PR7AR11W604**  
 Black, 3000K, 60° **118-PR7AR11B603**  
 Black, 4000K, 60° **118-PR7AR11B604**

### ACCESSORIES

36° Reflector **118-RFLA36**  
 24° Reflector **118-RFLA24**

### DRIVER CODES

10W **118-300MA**  
 8W **118-250MA**

### DALI DIMMING AVAILABLE UPON REQUEST

