


SIL0 60 SUSPENSION

The Silo Surface has a simple yet adaptable design, providing endless design opportunities. With various heights and diameters available, the Silo Surface allows you to channel your inner creative and design a custom look that is unique to your project.

- Minimalistic cylindrical design – Available in a variety of colours and shapes.
- Sophisticated lens technology – For enhanced visual comfort.
- Black baffle – For enhanced glare control.
- Seamless canopy with quick connection for easy installation.

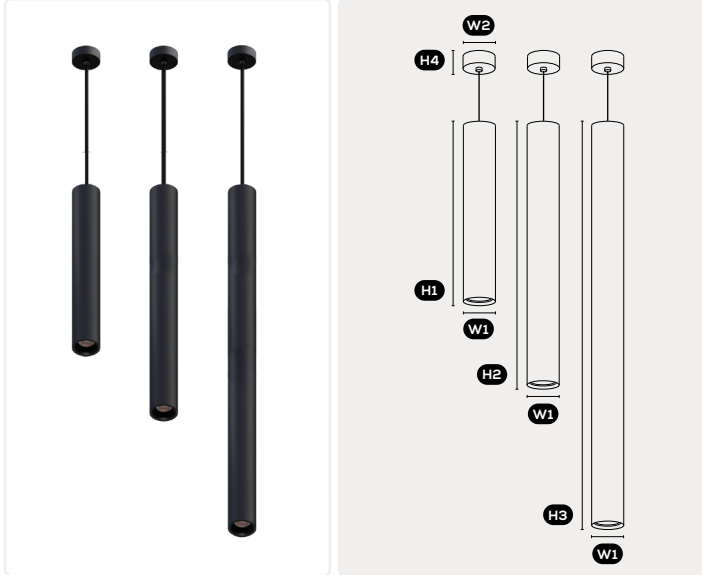

DIMENSIONS W1 Ø60mm H1 280mm H2 380mm H3 580mm

CANOPY DIMENSIONS H4 30mm W2 Ø60mm

CABLE LENGTH 2m

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

SIZE OPTIONS

280mm 380mm 580mm

FINISHES

WHITE BLACK

BAFFLE FINISHES

WHITE BLACK GOLD

GENERAL SPECIFICATIONS

LED LUMENS (3000K & 4000K)

12W 1080 lm

EFFICACY Up to 90 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Aluminium

CRI 92+

IP 20

COLOUR DEVIATION SDCM ≤2

UGR <15

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

PROJECT DETAILS

PROJECT

TYPE

NOTES

DRIVER SPECIFICATIONS

POWER 300mA 240V
Built-In Flicker Free
Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

280, White, 3000K, 60° **118-SIP62812W603**

280, White, 4000K, 60° **118-SIP62812W604**

280, Black, 3000K, 60° **118-SIP62812B603**

280, Black, 4000K, 60° **118-SIP62812B604**

380, White, 3000K, 60° **118-SIP63812W603**

380, White, 4000K, 60° **118-SIP63812W604**

380, Black, 3000K, 60° **118-SIP63812B603**

380, Black, 4000K, 60° **118-SIP63812B604**

580, White, 3000K, 60° **118-SIP65812W603**

580, White, 4000K, 60° **118-SIP65812W604**

580, Black, 3000K, 60° **118-SIP65812B603**

580, Black, 4000K, 60° **118-SIP65812B604**

ACCESSORIES

36° Reflector **118-SIL6036**

24° Reflector **118-SIL6024**

15° Reflector **118-SIL6015**

Black Baffle **118-SIL60BB**

White Baffle **118-SIL60BW**

Gold Baffle **118-SIL60BG**

